



LiveEdge® 2Go & 2Go Mini

Harness the power of the **LiveEdge® Ecosystem** in two small, rugged and portable form factors - designed for the most grueling on-the-go workflows - 2Go is perfect for supporting multiple camera angles or backup feeds.



PRODUCT OVERVIEW

LiveEdge® 2Go is the first in a family of powerful compute form factors designed for the contribution edge, delivering low-latency and cost-efficiency combined with low power consumption, all wrapped up in a surprisingly small package that's easy to set up and always ready to evolve - all delivered as part of the LiveEdge® full subscription model. 2Go-2i is a two input, standards-based, scalable UHD 4Kp30 solution for all types of professional streaming applications, especially demanding time-sensitive live workflows.

Rugged - housed in a tactical weather, dust, and crush-proof case.

Fast - setup using external connectors - no need to open the case.

Cool - fan assisted airflow keeps internal temperatures nice and low.

Green - low power consumption, less watts for a greener planet.


Videon's LiveEdge® 2Go is available with two, or four inputs - 2Go Mini with two inputs - and just the right licensing options to perfect your workflow:

2Go - LE-2GO

Exterior Dimensions:
17.5" x 17.61" x 7.31"


2Go Mini - LE-2GOM

Exterior Dimensions:
13.38" x 11.3" x 6"

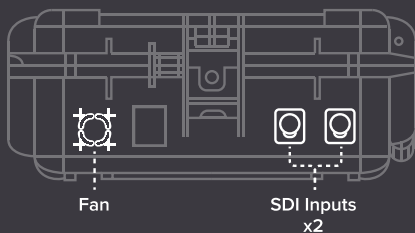

LEFT VIEW

LiveEdge® 2Go-2i

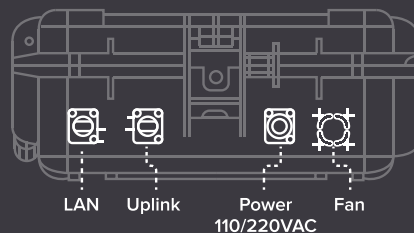


RIGHT VIEW

Each LiveEdge® 2Go includes LiveEdge® Compute, LiveEdge® Cloud Control and vCare support

LiveEdge® Compute - Empowers you to develop and Run container-based computing functions using Docker. Native and 3rd party containers are developed using the LiveEdge® Developer Program. To get started, check **videonlabs.com** for access to Developer Docs and sample code on GitHub.

LiveEdge® Cloud Control - Includes remote management and active monitoring w/alerts, presets/profiling, device and fleet configuration, batch processing, access to Cloud Control REST API and Docker management for LiveEdge® containers.

vCare - Live workflows are time-sensitive, so vCare includes the support you need, right when you need it! vCare provides a 24x7x365 dedicated pit crew, the insurance required for time-sensitive live streaming workflows, including software upgrades, updates, bug fixes and advanced replacement. Live workflows continue to evolve at warp speed, so LiveEdge® 2Go can be remotely upgraded via LiveEdge® Cloud Control.

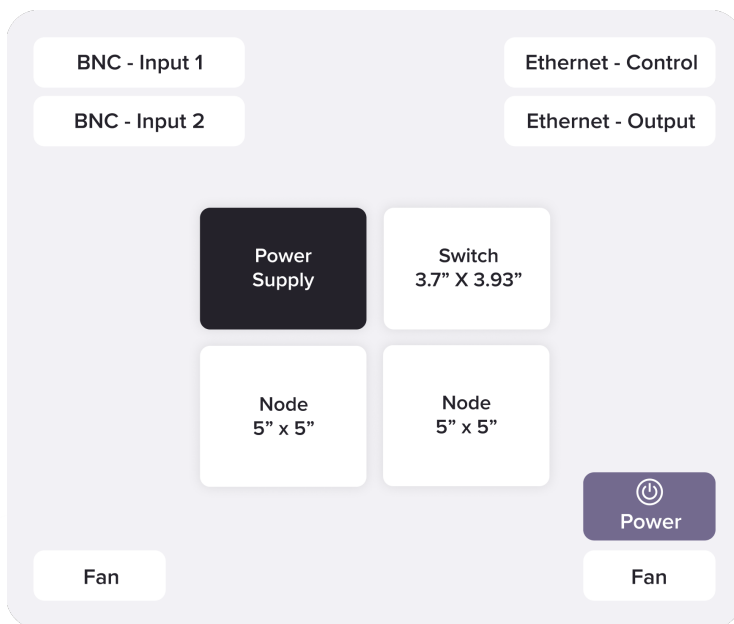

Add ons

LiveEdge® Stream - Minimizes latency and reduces cloud costs while providing viewers with a reliable, high-quality live streaming experience. LiveEdge® Stream enables (per input):

- Multi-Stream Output (3x RTMP/SRT/RTSP/WHIP - MPEG-2 TS Unicast x2IMulticast x1)
- Multi-Bit-Rate encoding (MBR) ladder up to a total of 4Kp30 - HLS, DASH, Low-Latency Chunked Transfer Encoding
- OTT Origin server for monitoring
- OTT HTTP Push with dual posting

LiveEdge® Ads - SCTE-35 marker insertion for monetization.

LiveEdge® Data - SMPTE-336 with KLV functionality for multi-camera time sync and user defined metadata for personalization.

LiveEdge® Graphix - Graphic overlay (4-5fps) for the visualization of scoreboard-type metadata on-screen.

LiveEdge® 2Go-2i Specifications:

- 2 Channel UHD 4Kp30 (2x LiveEdge® Node)
- 2x 3G SDI Inputs (BNC)
- 1x Ethernet Uplink
- 1x LAN port (local laptop)
- 110 / 220 VAC Input (powerCON 20)
- ~20W Total power